


AIR ADMITTANCE VALVE

Main applications

The AV1 manufactured in aluminium alloy/SS304. It has a control knob attached into a screw –actuated plunger. Turn the control knob clock wise to close the valve. The valve is connected to vacuum system with NW10 fitting.

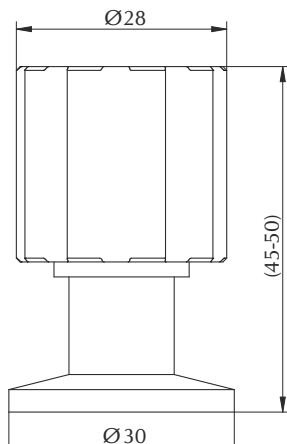

ORDER CODE-FVT8201AV1*

Technical data

Material of construction

Body : *HE30/SS304.
Control knob : Nylon 6
Seal : Viton

Leak Rate

Maximum leak rate across seat: 10^{-7} mbar l s⁻¹ / 7.5×10^{-8} Torr l s⁻¹
Maximum leak rate across body: 10^{-1} mbar l s⁻¹ / 7.5×10^{-2} Torr l s⁻¹
Vacuum connection: NW10
Weight: 0.16Kg



Flyvacuum Technologies Pvt. Ltd.

No.338, 9th Cross, 4th Phase

Peenya, Bangalore 560 058, Karnataka, INDIA

Tel.: +91 80 4852 1441

email: marketing@flyvacuum.com

www.flyvacuum.com